

Shanghai Goodview Electronic Technology Co., Ltd.

Specification

TC43H1



Sign and Date by: _____

Customer

Sign and Date by: _____

GoodView

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

Content

Chapter I.	Revision History	2
Chapter II.	Summary	3
2.1.	Statement	3
2.2.	Safety instructions	4
Chapter III.	Product Parameter	5
3.1.	Main Technical Parameters	5
3.2.	LCD Panel Technical Parameters	7
3.3.	Input Signal.....	8
3.3.1.	HDMI Port	8
3.3.2.	VGA Port	9
3.4.	Specification Overview	9
3.4.2.	Green mode function	9
3.5.	External Interface Portion.....	10
Chapter IV.	Mechanical Portion	11
4.1.	Outline drawing	11
Chapter V.	Packaging Portion	12
5.1.	Packing Size.....	12
5.2.	Packaging Drawings	12
5.3.	Nameplate	13
5.4.	Labels.....	13
5.4.1.	Nameplate Labels	14
5.4.2.	Packaging Labels	15
Chapter VI.	Environmental Requirement	15
6.1.	Operating Temperature	15
6.2.	Storage Temperature.....	16
Chapter VII.	ID Rendering	16
7.1.	Six Sides Figure.....	16
7.2.	Front View	17
7.3.	Back View	18
7.4.	End View	19
7.5.	Interface Rear View.....	19

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

Chapter II. Summary

2.1. Statement

All parts of this product, including accessories and software, all the intellectual property right are owned by Shanghai Goodview Electronic Technology Co., Ltd. (hereinafter refers to "Goodview") or authorizes the relevant subjects xxxx to use. Without the permission of the right subjects, no copying or translation is allowed.

There is no any form of guarantee, position expression or other implication in this manual, if there is any direct or indirect loss of data, loss of profits or termination of business caused by the product information mentioned in this manual, Goodview and its employees are not liable for it. In addition to this, the product specifications and information mentioned in this manual are only for reference and will be updated at any time without further notice. Faults or damages caused by the following factors are not covered by free warranty:

- ☞ Damage caused by natural disasters (floods, fires, earthquakes, lightning strikes, typhoons, etc.), force majeure or inadvertent use of man-made operations.
- ☞ Self-assemble, repair, or send the product to a maintenance shop not authorized or certified by Goodview for inspection and repair.
- ☞ Damages and faults caused by users who may or request a third party to modify, repair, alter specifications and install, add and expand parts that are not sold, authorized or approved by our company without authorization.
- ☞ Usage problems and faults caused by improper installation and setting of software by users themselves.
- ☞ Problems and malfunctions caused by computer viruses.
- ☞ Warranty identification label of our company is torn or unrecognizable.
- ☞ Other problems and faults caused by abnormal use.

The product names mentioned in the user's manual are only for identification, and these names may belong to registered trademarks or copyrights of other companies.

Goodview reserves the right to change any or all specifications without notice. The information contained in this document is subject to change without notice.

For the latest upgrade information of product specifications, please call to Shanghai Goodview Electronic Technology Co., Ltd.

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

2.2. Safety instructions

Safety of Electrical

- ❖ In order to avoid serious damage caused by possible electric shock, please remove the power cord of the equipment temporarily from the power socket before moving the equipment
- ❖ When you want to add or remove the hardware device in the system, you must connect the data line of the device first and then the power line. If possible, unplug the power cord of the device before installing the hardware device.
- ❖ Before you connect or unplug any data lines from the module, make sure that all the power lines have been unplugged beforehand.
- ❖ Before using an extension card or an adapter card, we suggest that you seek for professional assistance first. These devices may interfere with the grounding circuit.
- ❖ Make sure that the voltage settings of the power supply have been adjusted to the voltage standard values used in the country/region. If you are not sure what the supply voltage value is in your area, please ask the local power company personnel nearby.
- ❖ If the power supply is damaged, please do not attempt to repair it by yourself. Please seek the help of professional technical service personnel.

Safety in operation

- ❖ Before you install modules and add hardware devices, be sure to read the relevant information provided in this manual in detail.
- ❖ Before using the product, make sure that all the data lines and power lines are connected correctly. If you find any defects, please contact Goodview as soon as possible.
- ❖ In order to avoid electrical short circuit, make sure that all unused screw, paper clip and other parts are put away, and do not leave them on the module or in the equipment.
- ❖ Dust, moisture and drastic temperature changes will affect the life of the motherboard, so please try to avoid placing them in these places.
- ❖ Do not place the equipment in a place that is easy to shake.
- ❖ If there are any technical problems in the use of this product, please contact the technicians who have been verified or experienced.

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

Chapter III. Product Parameter

3.1. Main Technical Parameters

NO	Subtype	Name	Parameter	Unit	Note
1		Panel	42.51 inches LED backlight		
2	Product Parameter	Product size (mm)	997.6(H)×585.8 (V)×52.1(D)	mm	
3		Active size (mm)	940.2(H) ×528.4(V)	mm	
4		Color	Gold and black		
5		Weight (Gross)	21	KG	
6		Weight (Net)	17	KG	
7		Speaker	2×2W 4Ω	Watt	
8		Screen hanging mode	Portrait\ Landscape		
9		OSD Language	Chinese\ English		
10		Play mode	<input checked="" type="checkbox"/> Horizontal <input checked="" type="checkbox"/> Vertical <input checked="" type="checkbox"/> Split display <input checked="" type="checkbox"/> Play List		
11		Multimedia transmission	USB 、 WAN 、 LAN		
12		Watchdog function	Support		
13		Smart volume	Time- sharing volume		
14		Timing function	Multi-time timing power on/off, port timing automatic switch		
15		Management Software	C/S framework: ADPE/ Ezposter B/S framework: GTV Information Distribution System		
16	Core	CPU	RK 3288 Quad-core ARM Cortex A17 (Max. 1.6GHz)		
17		GPU	Quad-core Mail-764		

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

18		Memory	DDR3 2GB				
19		Storage	8G eMMC				
20		Operation System	Android 7.1				
21	Touch Panel	Touch Type	Capacitive				
22		Touch Point	10 point				
23		Touch resolution	16384 X 9600 (MAX)				
24		Enter mode	Finger、capacitive stylus				
25	Multimedia	Picture	Extension	JPG、JPEG、BMP、PNG			
26		Audio	Extension	MP3			
27		Video	Extension	MPEG1、MPEG2、MPEG4、H.264、WMV、MKV、TS、flv and other mainstream video formats			
28		Text	Extension	.txt			
29		HTMI 5		Support			
30	Installation	VESA standard	400×200 (Screw type M6×10mm)				
31		Hanging mode	VESA installation				
32	Accessories	1. Power line×1 2. Remote control×1 3. AAA battery×2 4. USB extension cable×1 5. 2.4G WiFi antenna × 1					
33	Certification						

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

3.2. LCD Panel Technical Parameters

	Symbol	Parameter			Unit	Note
		Min	Typ	Max		
LCD Panel Size		-	42.51	-	inches	Led backlight
Active Screen Size		941.184(H) x529.416 (V)			mm	
Pixel Format		1920×1080			Pixels	
Panel Luminance		-	450	-	cd/m ²	
Production Luminance			382.5		cd/m ²	
Contrast Ratio	CR	1000	1200	-		
Color Depth		8bit, 16.7 Million colors				
Pixel Pitch		0.4902*0.4902			mm	
Color Gamut			72%		%	
Color temperature			11000		K	
Response Time	G to G BW	-	8	12	ms	
Backlight Life Time		-	30000	-	Hrs	
Viewing Angle	Xaxis, right=0°	R	89	-	-	
	x axis, left=180°	L	89	-	-	
	y axis, up =90°	U	89	-	-	
	yaxis, down=270°	D	89	-	-	

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

3.3. Input Signal

3.3.1. HDMI Port

Resolution	Refresh
1024x768	@60Hz/50Hz
1600x900	@60Hz/50Hz
1280x800	@60Hz/50Hz
1280x720	@60Hz/50Hz
1280x1024	@60Hz/50Hz
1360x768	@60Hz/50Hz
1366x768	@60Hz/50Hz
1440x900	@60Hz/75Hz
1680x1050	@60Hz/50Hz
1920x1080	@60Hz/50Hz

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

3.3.2. VGA Port

Resolution	Refresh
1024x768	@60Hz/50Hz
1600x900	@60Hz/50Hz
1280x800	@60Hz/50Hz
1280x720	@60Hz/50Hz
1280x1024	@60Hz/50Hz
1360x768	@60Hz/50Hz
1366x768	@60Hz/50Hz
1440x900	@60Hz/75Hz
1680x1050	@60Hz/50Hz
1920x1080	@60Hz/50Hz

3.4. Specification Overview

3.4.1 AC Input Electrical Characteristics

Item	Symbol	Values			Unit	Note
		Min	Typ	Max		
AC Power Input Voltage	AC IN	100	220	240	VAC	
AC Power Input Current	TBD	-	-	1.5A	AAC	
Power Consumption	TBD	-	-	94	Watt	

3.4.2. Green mode function

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

Item	Symbol	Values			Unit	Note
		Min	Typ	Max		
Stand-by power consumption	TBD	/	/	0.5	Watt	


3.5. External Interface Portion

NO	Subtype	Name	Number	Parameter
1	AC input	Coupler	×1	Plum shaped terminal
2		AC Switch	×1	Rocker switch
3	Input Terminals	HDMI	×1	2.0
4		VGA	×1	1D-SUB 15pin
5		VGA Audio in	×1	3.5mm
6	Control Terminals	Ethernet RJ45	×1	100M Ethernet adaptive
7		WiFi	×1	2.4G/5G 802.11b/g/n/ac
8		Bluetooth	×1	Bluetooth 4.2
9		USB 2.0	×2	USB OTG USB HOST
10		TOUCH USB	×1	External touch USB interface
		Storage extension	×1	Micro TF Card 32G (Max)

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

Chapter IV. Mechanical Portion


4.1. Outline drawing

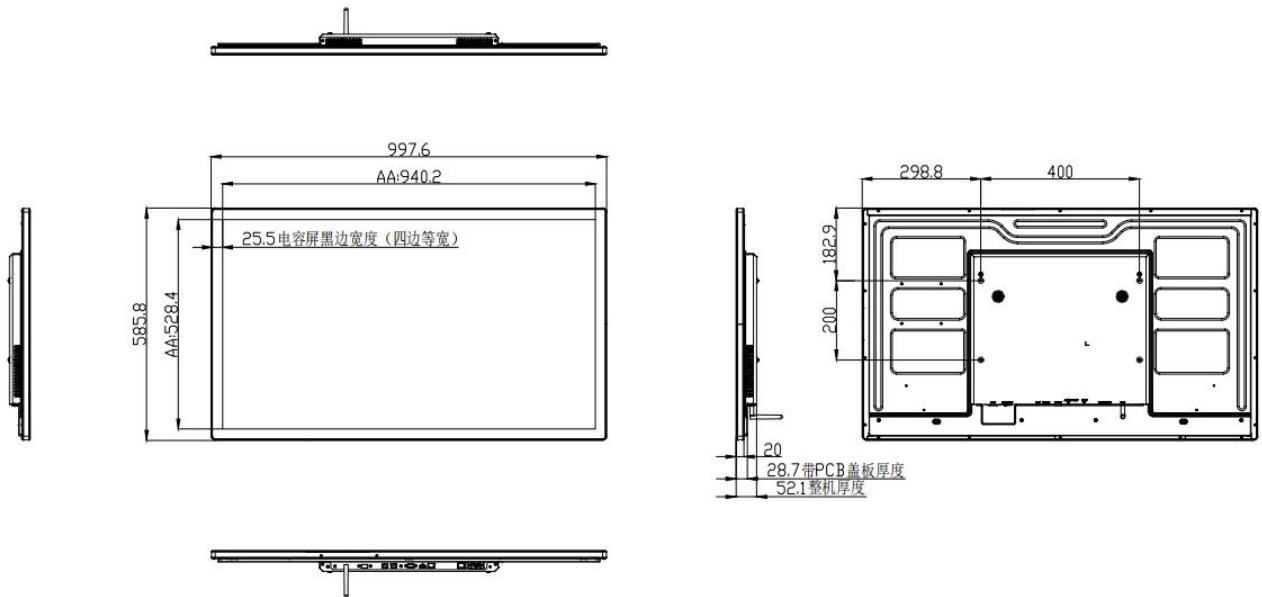

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

Chapter V. Packaging Portion


5.1. Packing Size

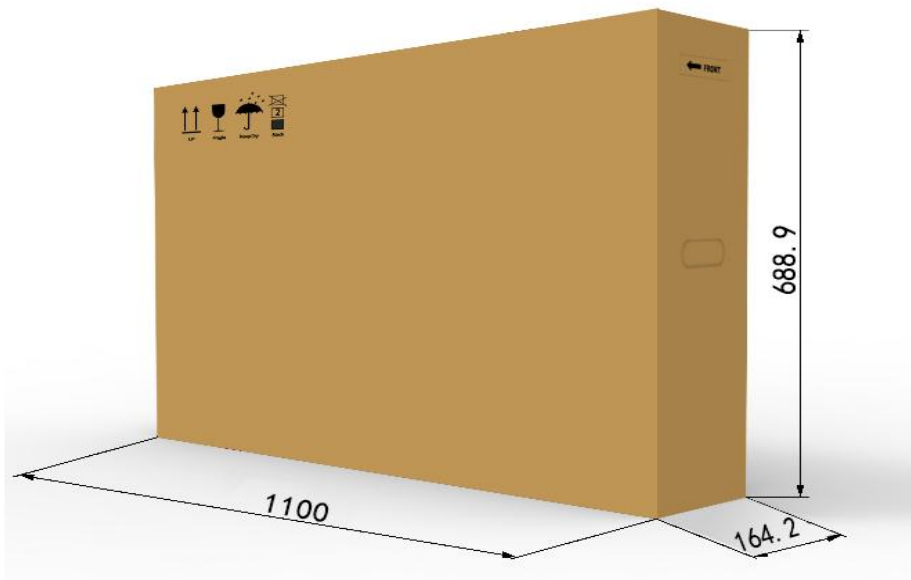

Continued

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

5.3. Nameplate

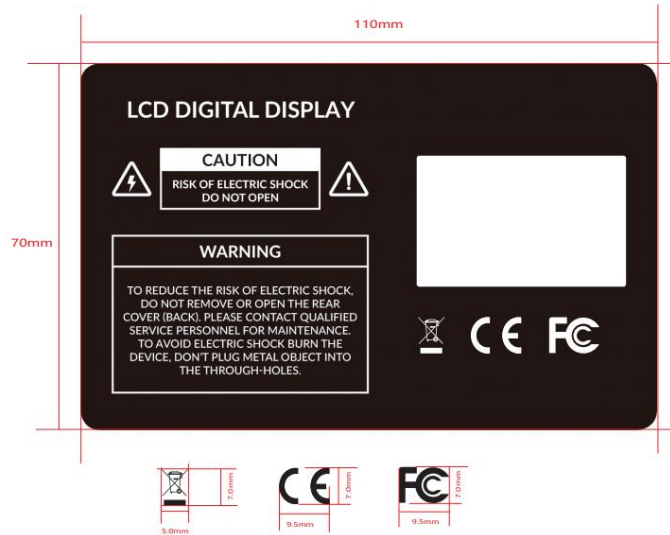

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

5.4. Labels

5.4.1. Nameplate Labels


Model Number: TC43H1

Part Number:1410179

Remark: 20210930001


GV3288

Serial Number:



JS1320014E19190474A

MODEL NO: TC43H1
 POWER RATING:
 110-240V~, 50/60Hz, 1.5A
 Part Number:140179



JS1320014E19190474A

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

Chapter VI. Environmental Requirement

6.1. Operating Temperature

Item	Symbol	Values			Unit	Note
		Min	Typ	Max		
Operating Temperature	Hop	0	-	40	°C	
Operating Ambient Humidity	Hop	10%	-	80%	RH	Relative humidity (non-condensing).

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

6.2. Storage Temperature

Item	Symbol	Values			Unit	Note
		Min	Typ	Max		
Storage Temperature	HST	-10	-	55	°C	
Storage Humidity	HST	10	-	80%	RH	relative humidity (non-condensing).

Chapter VII. ID Rendering

7.1. Six Sides Figure




File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

7.2. Front View



File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

7.3. Back View

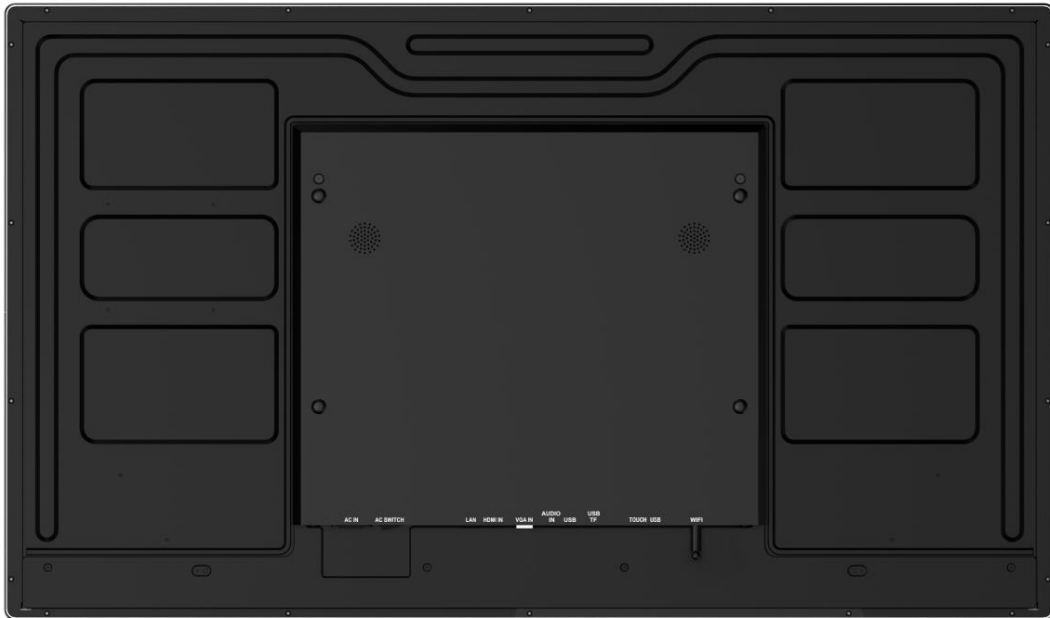

File Type	<input type="checkbox"/> Management guide <input type="checkbox"/> Program file <input type="checkbox"/> Management standard <input checked="" type="checkbox"/> Technical manual <input type="checkbox"/> Standard class <input type="checkbox"/> Inspection specification <input type="checkbox"/> Inspection guide <input type="checkbox"/> Inspection standard <input type="checkbox"/> Guidance file <input type="checkbox"/> Technical standard						
File Code	GV-RD-PJ-039	Version	V1.0	Effective Date	2019/9/1	Page	19

7.4. End View

